

SOLAR INVERTERS

ABB string inverters

TRIO-TM-50.0-400 / TRIO-TM-60.0-480

50 to 60 kW



01

01 TRIO-TM-50.0/60.0 outdoor string inverter

This new addition to the TRIO family, with 3 independent MPPT and power ratings of up to 60 kW (480 V version), has been designed with the objective to maximize the ROI in large systems with all the advantages of a decentralized configuration for both rooftop and ground-mounted installations.

Modular design

The TRIO-TM-50.0/60.0 has a modular design to guarantee maximum flexibility, thanks to the different versions available.

The separate and configurable AC and DC compartments increase the ease of installation and maintenance with their ability to remain separately wired from the inverter module inside the system. The TRIO comes with the most complete wiring box configurations available including up to 15 DC inputs with fast connectors, string protection fuses, AC and DC switches and type II AC and DC surge arresters.

Design flexibility

The double stage conversion topology offers the advantage of a wide input voltage range for maximum flexibility of system design.

The TRIO-TM comes with a forced air cooling system, used also in the previous TRIO products, designed for a simple and fast maintenance, allowing a maximum flexibility of plant design. The inverter comes with mounting supports for both horizontal and vertical installations, which allow for the best use of space available beneath the solar panels.

Embedded multi communication interfaces (WLAN,

The TRIO-TM-50.0/60.0 is ABB's latest three-phase string solution for cost efficient large decentralized photovoltaic systems for both commercial and utility applications.

Ethernet, RS485) combined with a Sunspec compliant Modbus protocol (RTU/TCP) allow the inverter to be easily integrated with any third party monitoring and control systems.

Improved commissioning and maintenance

Thanks to the build-in Web User Interface (WUI) the installer can commission the inverter wirelessly and change advanced parameters by using any standard WLAN enabled device (smartphone, tablet or PC). Integrated logging capability allows remote monitoring of the plant without the need of any additional external loggers.

Remote firmware update of the inverter system and components via Aurora Vision®.

Highlights

- 3 Independent MPPT
- Transformerless inverter
- Double stage topology for a wide input range
- Large set of specific grid codes available which can be selected directly in the field
- Separate AC and DC compartments are available in different configurations
- Both vertical and horizontal installation
- 2 available sizes, 50 and 60 kW with 400 and 480 Vac of output voltage, respectively
- Wireless access to embedded user interfaces
- Ethernet daisy chain enabled
- Modbus TPC/RTU Sunspec compliant
- Remote monitoring and firmware update via Aurora Vision® (logger free)

ABB string inverters

TRIO-TM-50.0-400

TRIO-TM-60.0-480


50 to 60 kW



Technical data and types

| Type code | TRIO-TM-50.0-400 | TRIO-TM-60.0-480 |
|--|---|--|
| Input side | | |
| Absolute maximum DC input voltage ($V_{max,abs}$) | 1000 V | |
| Start-up DC input voltage (V_{start}) | 420...700 V (Default 420 V) | 420...700 V (Default 500 V) |
| Operating DC input voltage range ($V_{dcmin}...V_{dcmax}$) | 0,7x V_{start} ...950 V (min 300 V) | 0,7x V_{start} ...950 V (min 360 V) |
| Rated DC input voltage (V_{dcr}) | 610 Vdc | 720 Vdc |
| Rated DC input power (P_{dcr}) | 52000 W | 61800 W |
| Number of independent MPPT | 3 (SX and SX2 version) / 1 (standard and SX version) | |
| Maximum DC input power for each MPPT ($P_{MPPT,max}$) | 17500 W | 21000 W |
| MPPT input DC voltage range ($V_{MPPTmin} ... V_{MPPTmax}$) at P_{acr} | 480-800 Vdc | 570-800 Vdc |
| Maximum DC input current ($I_{dc,max}$) for each MPPT | 36 A | |
| Maximum input short circuit current for each MPPT | 55 A (165 A in case of parallel MPPT) | |
| Number of DC input pairs for each MPPT | 5 | |
| DC connection type | Screw terminal block (Standard and -S version) or PV quick fit connector ³⁾ (-SX and SX2 version) | |
| Input protection | | |
| Reverse polarity protection | Yes, from limited current source | |
| Input over voltage protection for each MPPT - varistor | Yes, 1 for each MPPT | |
| Input over voltage protection for each MPPT - plug In modular surge arrester | Type 2 (option) with monitoring | |
| Photovoltaic array isolation control | According to local standard | |
| DC switch rating for each MPPT (version with DC switch) | 60 A / 1000 V for each MPPT (180 A in case of parallel MPPT) | |
| Fuse rating (version with fuses) | 15 A / 1000 V | |
| Output side | | |
| AC grid connection type | Three-phase (3W+PE or 4W+PE) | |
| Rated AC power (P_{acr} @ $\cos\phi=1$) | 50000 W | 60000 W |
| Maximum AC output power ($P_{ac,max}$ @ $\cos\phi=1$) | 50000 W | 60000 W |
| Maximum apparent power (S_{max}) | 50000 VA | 60000 VA |
| Rated AC grid voltage (V_{acr}) | 400 V | 480 V |
| AC voltage range | 320...480 V ¹⁾ | 384...571 V ¹⁾ |
| Maximum AC output current ($I_{ac,max}$) | 77 A | |
| Contributory fault current | 92 A | |
| Rated output frequency (f_r) | 50 Hz / 60 Hz | |
| Output frequency range ($f_{min}...f_{max}$) | 47...53 Hz / 57...63 Hz ²⁾ | |
| Nominal power factor and adjustable range | > 0.995; 0...1 inductive/capacitive with maximum S_{max} | |
| Total current harmonic distortion | <3% | |
| Maximum AC cable | 95 mm ² copper only (150 mm ² copper/alluminum with TRIO-AC-WIRING-KIT) | |
| AC connection type | Screw terminal block, cable gland | |
| Output protection | | |
| Anti-islanding protection | According to local standard | |
| Maximum external AC overcurrent protection | 100 A | |
| Output overvoltage protection - varistor | Yes | |
| Output overvoltage protection - plug In modular surge arrester | Type 2 (option) with monitoring | |
| Operating performance | | |
| Maximum efficiency (η_{max}) | 98.3% | 98.5% |
| Weighted efficiency (EURO) | 98.0% / - | 98.0% / - |
| Communication | | |
| Embedded communication interfaces | 2x RS485, 2x Ethernet (RJ45), WLAN (IEEE802.11 b/g/n @ 2,4 GHz) | |
| Communication protocols | Modbus RTU / TCP (Sunspec compliant); Aurora Protocol | |
| Remote monitoring services | Standard level access to Aurora Vision monitoring portal | |
| Advanced features | Integrated Web User Interface; Display (option); Embedded logging and direct transferring of data to Cloud | |
| Environmental | | |
| Ambient temperature range | -25...+60°C (-13...140 °F) with derating above 45 °C (113 °F) | -25...+60°C (-13...140 °F) with derating above 45 °C (113 °F) |
| Relative humidity | 4%... 100% condensing | |
| Sound pressure level, typical | 75 dB(A) @1 m | |
| Maximum operating altitude | 2000m / 6561ft | |
| Physical | | |
| Environmental protection rating | IP65 (IP54 for cooling section) | |
| Cooling | Forced air | |
| Dimension (H x W x D) | 725 mm x 1491 mm x 315 mm / 28.5" x 58.7" x 12.4" | |
| Weight | 95 kg / 209 lbs overall, 66 kg / 145 lbs electronic compartment, 15 kg / 33 lbs AC wiring box (full optional), 14kg / 31 lbs DC wiring box (full optional) | |
| Mounting system | Wall bracket, horizontal support | |

ABB TRIO-TM-50.0-400 / TRIO-TM-60.0-480 string inverter block diagram

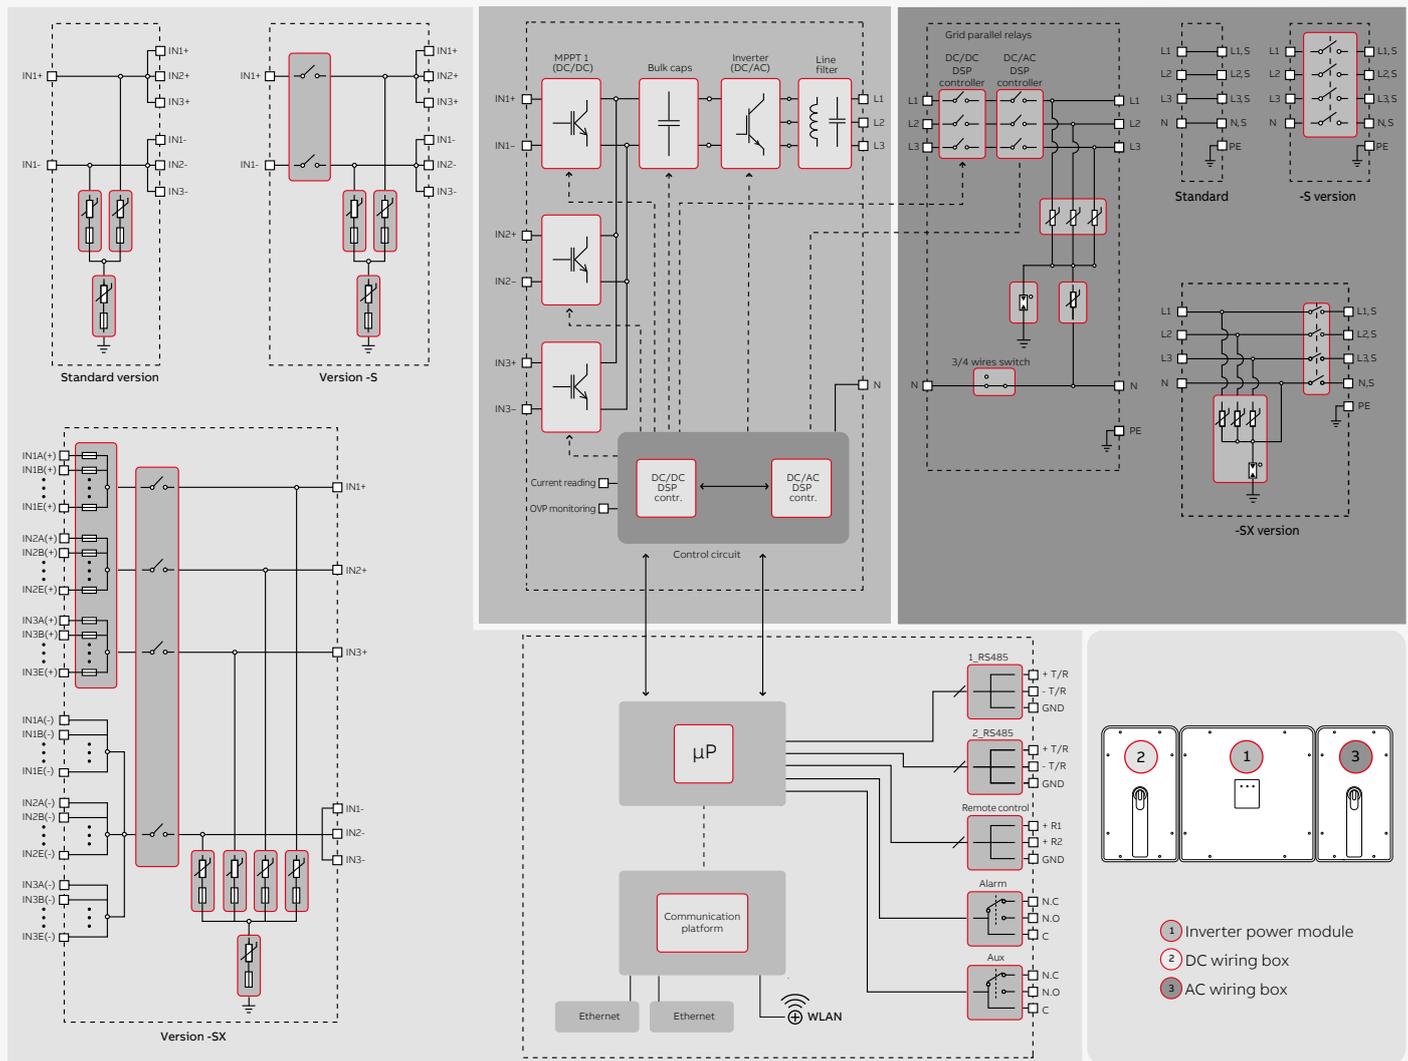

Technical data and types

| Type code | TRIO-TM-50.0-400 | TRIO-TM-60.0-480 |
|--|--|-------------------------------|
| Safety | | |
| Isolation level | Transformerless | |
| Marking | CE | |
| Safety and EMC standard | IEC/EN 62109-1, IEC/EN 62109-2, EN 61000-6-2, EN 61000-6-3, EN 61000-3-11, EN 61000-3-12 | |
| Grid standard (check your sales channel for availability) | CEI 0-21, CEI 0-16, DIN V VDE V 0126-1-1, VDE-AR-N 4105, G59/3, EN 50438 (not for all national appendices), RD 1699, RD 413, RD 661, P.O. 12.3, AS 4777, BDEW, NRS-097-2-1, MEA, PEA, IEC 61727, IEC 60068, IEC 61683, VFR-2014, IEC 62116 | |
| Available product variants | | |
| Inverter power module | TRIO-TM-50.0-400-POWER MODULE | TRIO-TM-60.0-480-POWER MODULE |
| DC wiring box options ⁴⁾ | | |
| Input connections with terminal blocks | DCWB-TRIO-TM-50.0-400 | DCWB-TRIO-TM-60.0-480 |
| Input connections with terminal blocks + DC switch | DCWB-S-TRIO-TM-50.0-400 | DCWB-S-TRIO-TM-60.0-480 |
| 15 quick input connections + fuses (single pole) + DC switch ⁵⁾ | DCWB-SX-TRIO-TM-50.0-400 | DCWB-SX-TRIO-TM-60.0-480 |
| 15 quick input connections + fuses (both poles) + DC switch ⁵⁾ | DCWB-SX2-TRIO-TM-50.0-400 | DCWB-SX2-TRIO-TM-60.0-480 |
| AC wiring box options | | |
| AC output connections with terminal blocks | ACWB-TRIO-TM-50.0 | ACWB-TRIO-TM-60.0 |
| AC output connections with terminal blocks + AC switch ⁵⁾ | ACWB-SX-TRIO-TM-50.0 | ACWB-SX-TRIO-TM-60.0 |
| Optional available | | |
| TRIO-GROUNDING-KIT | Available | Available |
| TRIO-AC-WIRING-KIT | Available | Available |

¹⁾ The AC voltage range may vary depending on specific country grid standards

²⁾ The Frequency range may vary depending on specific country grid standards

³⁾ Please refer to the document "String inverters – Product manual appendix" available at www.abb.com/solarinverters for information on the quick-fit connector brand and model used in the inverter

⁴⁾ DCWB with display is available as optional, with dedicated wiring box version

⁵⁾ Type 2 surge arresters available as optional, with dedicated wiring box version

Remark. Features not specifically listed in the present data sheet are not included in the product

SOLD BY :-

GO SOLAR SOLUTIONS

TEL : +91 80486 05527, +91 22 2788 2610

www.gosolar.co.in | email: sales@gosolar.co.in



—
We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG. Copyright© 2017 ABB
All rights reserved

