



# MAXPOWER CS6X-310 | 315 | 320 | 325 P

The high quality and reliability of Canadian Solar's modules is ensured by 15 years of experience in module manufacturing, well-engineered module design, stringent BOM quality testing, an automated manufacturing process and 100% EL testing.

**25**  
years  
linear power output warranty

**10**  
years  
product warranty on materials and workmanship

## KEY FEATURES



Excellent module efficiency of up to 16.94 %



Outstanding low irradiance performance of up to 96.0 %



High PTC rating of up to 91.97%



IP67 junction box for long-term weather endurance



Heavy snow load up to 5400 Pa, wind load up to 2400 Pa

## MANAGEMENT SYSTEM CERTIFICATES\*

ISO 9001:2008 / Quality management system

ISO 14001:2004 / Standards for environmental management system

OHSAS 18001:2007 / International standards for occupational health & safety

## PRODUCT CERTIFICATES\*

IEC 61215 / IEC 61730: TÜV-Rheinland / VDE / CE / CEC AU / MCS / KEMCO / INMETRO / JET / CQC

UL 1703 / IEC 61215 performance: CEC listed (US)

UL 1703: CSA / IEC 61701 ED2: VDE / IEC 62716: VDE

UNI 9177 Reaction to Fire: Class 1

IEC 60068-2-68: SGS / Take-e-way




\* As there are different certification requirements in different markets, please contact your local Canadian Solar sales representative for the specific certificates applicable to the products in the region in which the products are to be used.


**CANADIAN SOLAR INC.** is committed to providing high quality solar products, solar system solutions and services to customers around the world. As a leading PV project developer and manufacturer of solar modules with over 17 GW deployed around the world since 2001, Canadian Solar Inc. (NASDAQ: CSIQ) is one of the most bankable solar companies worldwide.

## ENGINEERING DRAWING (mm)


### Rear View

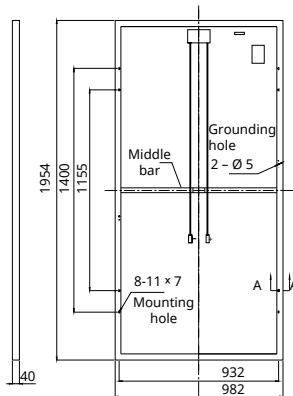


### Frame Cross Section A-A



### Mounting Hole



## CS6X-320P / I-V CURVES

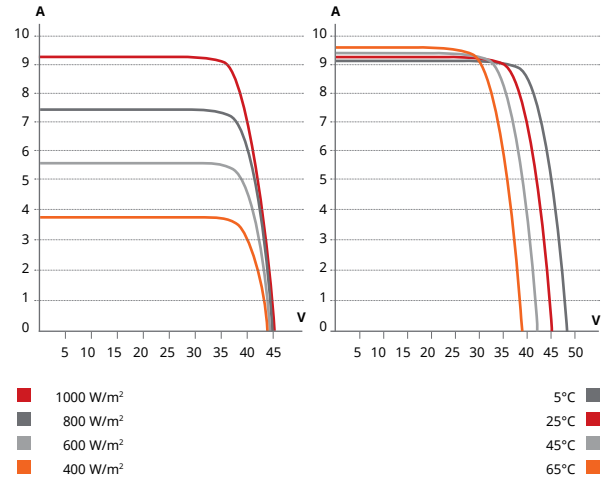

## ELECTRICAL DATA | STC\*

CS6X	310P	315P	320P	325P
Nominal Max. Power (P <sub>max</sub> )	310 W	315 W	320 W	325 W
Opt. Operating Voltage (V <sub>mp</sub> )	36.4 V	36.6 V	36.8 V	37.0 V
Opt. Operating Current (I <sub>mp</sub> )	8.52 A	8.61 A	8.69 A	8.78 A
Open Circuit Voltage (V <sub>oc</sub> )	44.9 V	45.1 V	45.3 V	45.5 V
Short Circuit Current (I <sub>sc</sub> )	9.08 A	9.18 A	9.26 A	9.34 A
Module Efficiency	16.16%	16.42%	16.68%	16.94%
Operating Temperature	-40°C ~ +85°C			
Max. System Voltage	1000 V (IEC) or 1000 V (UL)			
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)			
Max. Series Fuse Rating	15 A			
Application Classification	Class A			
Power Tolerance	0 ~ + 5 W			

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C.

## ELECTRICAL DATA | NOCT\*

CS6X	310P	315P	320P	325P
Nominal Max. Power (P <sub>max</sub> )	225 W	228 W	232 W	236 W
Opt. Operating Voltage (V <sub>mp</sub> )	33.2 V	33.4 V	33.6 V	33.7 V
Opt. Operating Current (I <sub>mp</sub> )	6.77 A	6.84 A	6.91 A	6.98 A
Open Circuit Voltage (V <sub>oc</sub> )	41.3 V	41.5 V	41.6 V	41.8 V
Short Circuit Current (I <sub>sc</sub> )	7.36 A	7.44 A	7.50 A	7.57 A

\* Under Nominal Operating Cell Temperature (NOCT), irradiance of 800 W/m<sup>2</sup>, spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

## PERFORMANCE AT LOW IRRADIANCE

Outstanding performance at low irradiance, with an average relative efficiency of 96.0 % from irradiances, between 1000 W/m<sup>2</sup> and 200 W/m<sup>2</sup> (AM 1.5, 25°C).

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, Canadian Solar Inc. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Caution: For professional use only. The installation and handling of PV modules requires professional skills and should only be performed by qualified professionals. Please read the safety and installation instructions before using the modules.

## MECHANICAL DATA

Specification	Data
Cell Type	Poly-crystalline, 6 inch
Cell Arrangement	72 (6×12)
Dimensions	1954×982×40 mm (76.9×38.7×1.57 in)
Weight	22 kg (48.5 lbs)
Front Cover	3.2 mm tempered glass
Frame Material	Anodized aluminium alloy
J-Box	IP67, 3 diodes
Cable	4 mm <sup>2</sup> (IEC) or 4 mm <sup>2</sup> & 12 AWG 1000V (UL), 1150 mm
Connector	T4 series or PV2 series
Per Pallet	26 pieces, 620 kg (1366.9 lbs)
Per Container (40' HQ)	624 pieces

## TEMPERATURE CHARACTERISTICS

Specification	Data
Temp. Coefficient (P <sub>max</sub> )	-0.41 % / °C
Temp. Coefficient (V <sub>oc</sub> )	-0.31 % / °C
Temp. Coefficient (I <sub>sc</sub> )	0.053 % / °C
Nominal Operating Cell Temperature	45±2 °C

## PARTNER SECTION

Sold in India by:  
Go Solar Solutions  
Call: +918048605527/ +912227882610  
Email: sales@gosolar.co.in  
Web: www.gosolar.co.in

Scan this QR-code to discover solar projects built with this module

